




JTBATT40 BATTERY PROTECTOR

INSTALLATION GUIDE:

- Connect the WHITE cable of JTBATT40 to the POSITIVE terminal of your 12V appliance.
- Connect the NEGATIVE terminal of your 12V appliance to the NEGATIVE terminal of battery or metal frame of your car.
- Connect the BLACK cable of JTBATT40 to the NEGATIVE terminal of battery or metal frame of your car.
- Connect the RED cable to the POSITIVE terminal of battery.
- Select a suitable cut-off voltage 10.2V or 11V
- Turn on the battery protector

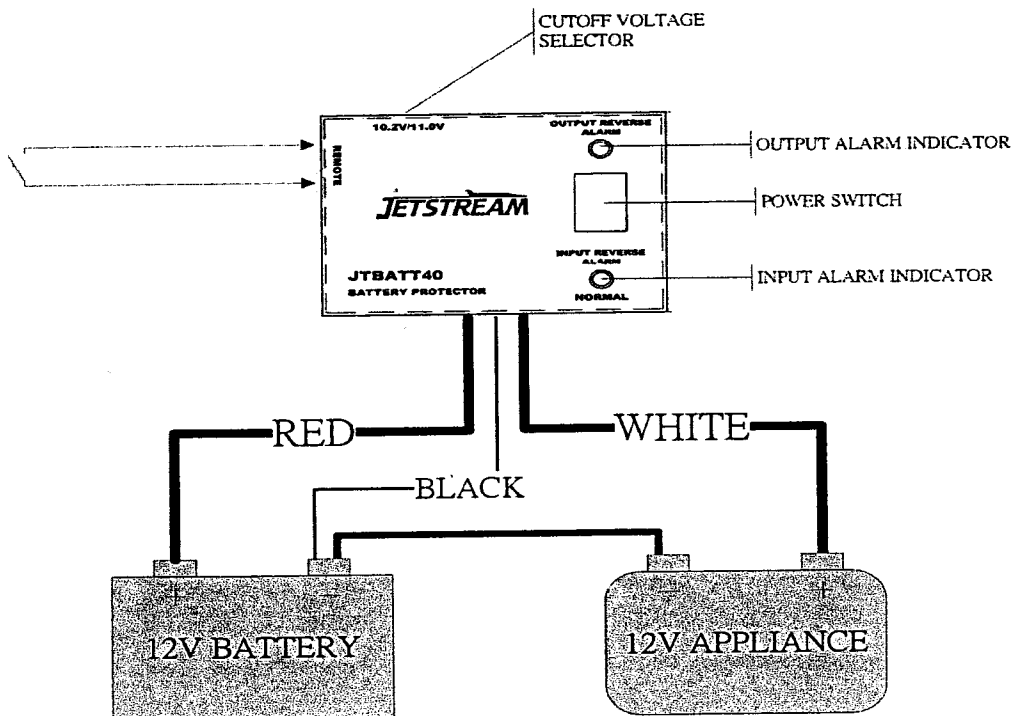

- Battery protector will cut the supply to your appliance when the battery voltage falls below 11.0V, the JTBATT40 with switch to select the cut-off voltage as 10.2V or 11V, when BP switches off, battery must be re-charged immediately with suitable Battery Charger to avoid serious damage to battery.
- When the battery protector connected correct, the LED light GREEN, when you connected wrong direction, the LED light RED
- The REMOTE terminal block used for remote control the BP ON/OFF from distance location.