



Palstar Incorporated
9676 N. Looney Rd.,
Piqua, OH 45356 USA
Customer Service and Sales Telephone:
1-800-773-7931
Fax:
1-937-773-8003
Email:
info@palstar.com

DLI500 Dummy Load


Owner's Manual



SPECIFICATIONS

IMPEDANCE	54Ω +0/-5%
SWR	<1.3 DC—100 Mhz <1.4 100—500 Mhz
POWER DISSIPATION	SEE CHART BELOW
RATING/FREQUENCY:	DC—30 Mhz 1500 w 30—60 Mhz 1000 w 60—150 Mhz 750 w 150—450 Mhz 350-500 w

Power Capability

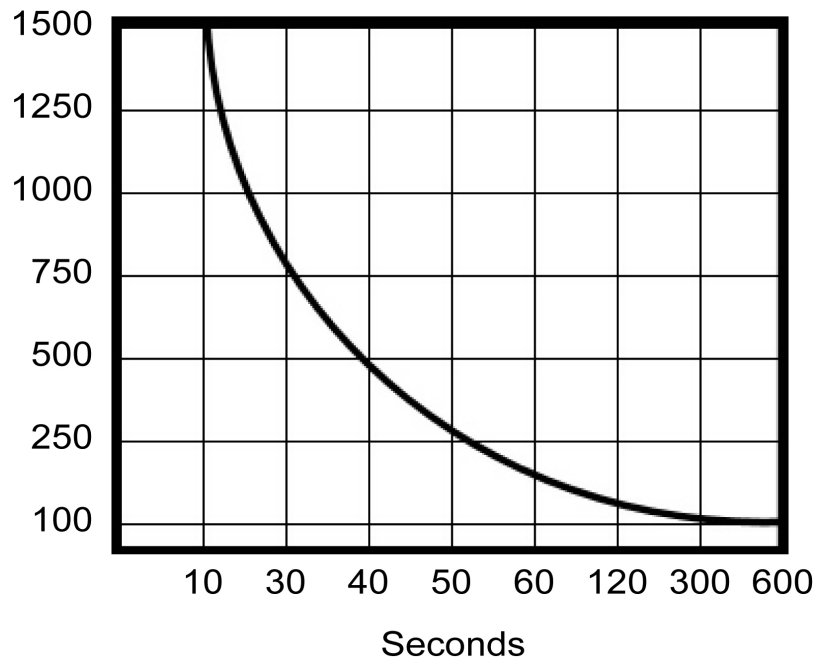

The Palstar DL1500 dummy load utilizes a solid ceramic resistive element that is non-inductive and very resistant to overload and high temperature operation. Palstar uses a metal, custom designed hyperbolic cone to achieve a useable frequency response to 500 Mhz.